

MONROE API Oil/Water Separator



Monroe custom oil/water separators are designed per American Petroleum Institute standards (API) for above and below ground installations.

The Monroe API Separator is designed for the removal of free oil and solids. If the removal of soluble substances is required, Monroe can provide additional treatment equipment or will recommend other Monroe Clarifiers.

Gravity differential settling is used to separate the oil from water. Monroe engineers will evaluate the type and state of the oil and the characteristics of the waste stream to determine the proper design and size of the separator. Oil globule size, specific gravity of the oil and wastewater, temperature and viscosity should be considered. Suspended solids will also be settled from the wastewater and provisions of this will be part of the design.

Monroe is able to provide API Separators in large shop-fabricated and assembled units to reduce installation costs. Separators as large as 14 feet wide x 70 feet long can be shipped from our factory in one piece fully assembled.



Separators as large as 14 feet wide x 70 feet long can be shipped from our factory in one piece fully assembled.

The basic components of the Monroe Separator include an inlet section with diffusion wall, separator channel, an oil retention baffle and an outlet section. Depending on your requirements, additional options can include trash screens, a slotted pipe skimmer, surface conveyors, and a bottom drag or screw conveyor for solids handling.


Complete covers of various materials are available including the necessary environmental and safety requirements. These provisions may include a nitrogen blanketing system, carbon filtering to remove hydrocarbons from the blanket gas, exhaust flares and pressure relieving valves and access doors.

Above ground Separators are normally constructed from carbon steel with corrosion resistant coatings. Below ground Separators are normally fabricated from steel or concrete and may include the additional requirements for containment and leak detection.

Existing API Separators can be upgraded with new internal components. In addition, Monroe parallel plate packs can be added to existing API Separators to increase the effective surface area which will provide increased oil removal and increased wastewater flow capacity.



MONROE API Oil/Water Separator

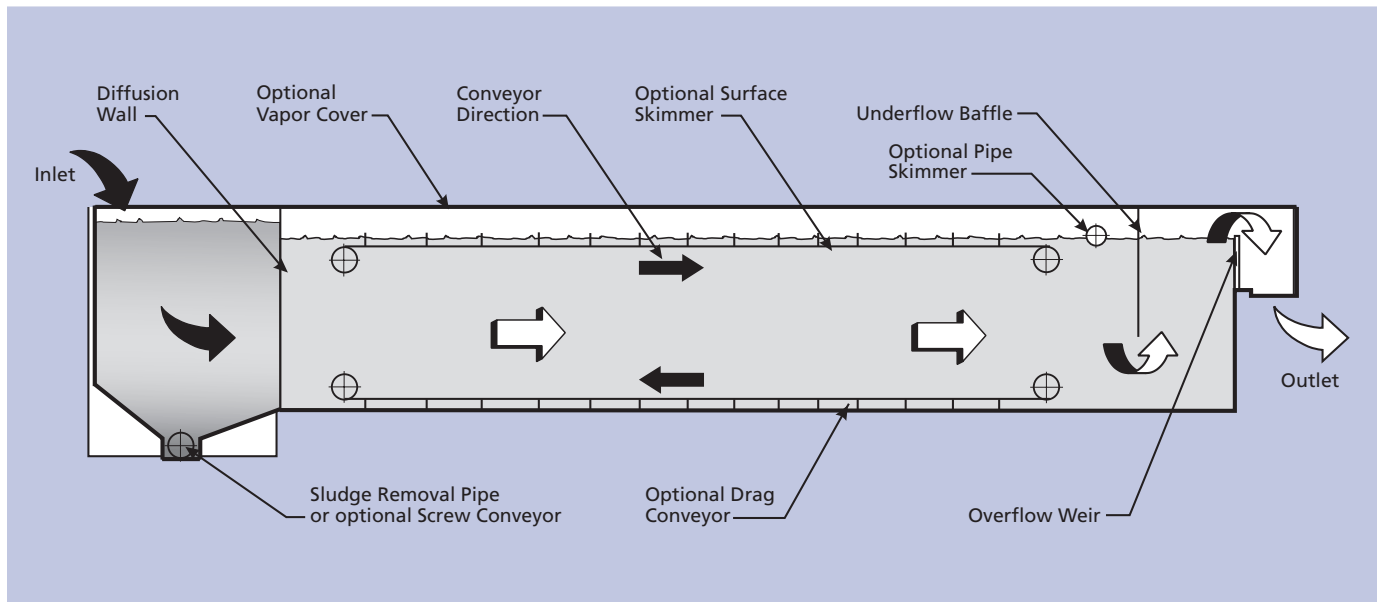

Special Features

- Remove oil from wastewater
- Custom designed for your application
- Prefabricated units from 10 to 500 gallons per minute
- Separators shipped one piece up to 14 feet wide x 70 feet long
- Mechanical surface skimmer and pipe skimmer available
- Mechanical drag conveyor available
- Vapor covers available with environmental and safety equipment
- Retrofit components to upgrade existing separators
- Monroe Parallel Plate packs to improve oil removal in existing separators

Monroe Environmental designs and builds other liquid cleaning and recycling equipment including:

- Compact Clarifiers (horizontal flow)
- Oil Skimmers
- Circular Clarifiers
- API Separators
- Complete Engineered Systems



**MONROE
ENVIRONMENTAL**

Manufacturer of Industrial Filtration Systems

810 West Front St., P.O. Box 806
Monroe, Michigan 48161 USA
Phone: **1-800-992-7707** or 734-242-7654
Fax: 734-242-5275

www.mon-env.com

Registered ISO 9001
Monroe Environmental is a
QS/TE 9000 Company

©2002 Monroe Environmental Corporation